


## TECHNICAL SHEET ROOF ACCESS STAIRS TYPE MECANO INDUSTRIAL **ROOFWALKS**

<b>CODE</b>	Scale600
<b>RIELS</b>	Vertical 42-42-2.5mm with hot dip galvanized finish
<b>FIXATION</b>	Fixed to structure pillars or metal sills
<b>MINIMUM WIDTH</b>	600 mm
<b>STEPS</b>	Pipe 1" diameter 2mm thick with hot dip galvanized finish
<b>SEPARATION OF STEPS</b>	They will not exceed 300mm of separation between
<b>FIXING OF STEPS</b>	Fixed to vertical with bolts 3/8" x 2 1/2" c/ hexagonal nut 3/8" y galvanized finish
<b>SAFETY ACTION</b>	With guard-body ring for operator safety from 2.40 meters high, separated from each other every 700 mm (plates 38 x 5mm galvanized finish)
<b>INFORMATION TO HIGHLIGHT</b>	Hot-dip galvanized finish according to standard ASTM A123 / A123M-02 (materials in general) y ASTM A-153M-95 class c (centrifuged materials)

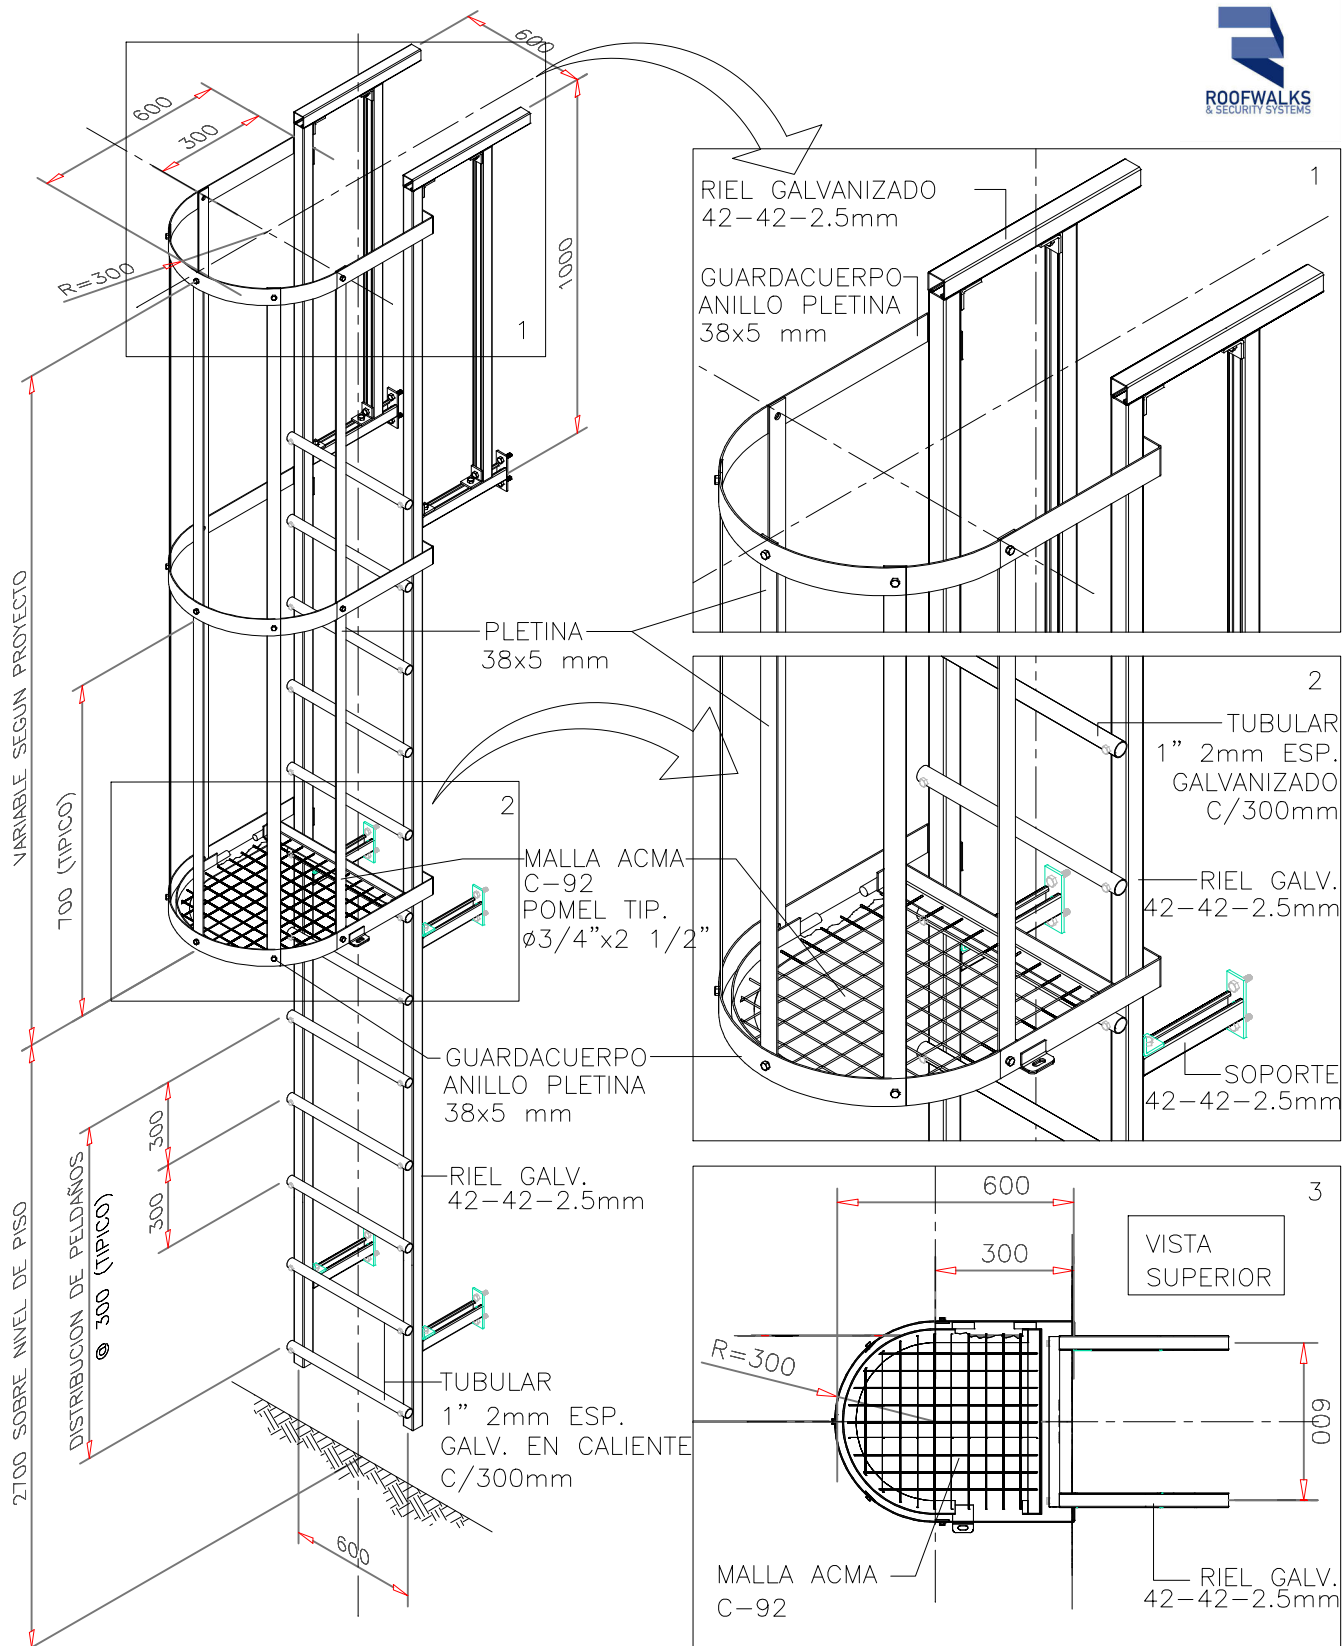

NOTAS GENERALES Y OBSERVACIONES

- 1.- ACERO CALIDAD A37-24ES
- 2.- RIEL Y TUBERIAS GALVANIZADAS POR INMERSION EN CALIENTE
- 3.- ESP. e=6mm(conex)-2 y 2,5mm(riel)
- 4.- PERFORACIONES 14mm
- 3.- TERMINACIONES :  
GALVANIZADO POR INMERSION EN CALIENTE

ROOFWALKS & SECURITY SYSTEMS

Pintor Jose Gil de Castro 7786 Las Condes  
www.roofwalks.cl - contacto@roofwalk.cl  
FONO +56 9 9969 1415

TITULO ESCALA DE GATO C/TAPA  
DISPOSICION GENERAL

HOJA 1 DE 1

ESCALA : S/ESCALA REV.No 2